

Архангельск (8182)63-90-72  
Астана (7172)727-132  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06

Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81

Киргизия (ак)312-96-26-47

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16

Россия (495)268-04-70

Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13

Казахстан (772)734-952-31

Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

[www.aeg.nt-rt.ru](http://www.aeg.nt-rt.ru) | | [age@nt-rt.ru](mailto:age@nt-rt.ru)

# Технические характеристики на инверторные системы PROTECT MIP INV бренда AEG Power Solutions

# PROTECT MIP INV

MODULAR SWITCH-MODE  
INDUSTRIAL APPLICATIONS  
INVERTER



## Input

24 / 48 / 60 / 110 / 220 VDC


## Output

230 VAC

## Applications

The inverter system is design for all industrial applications and provides secured power for all types of AC loads. The design is modular and scalable with hot- swappable inverter modules which ensures low Mean Time to Repair (MTTR), reduction in service costs and meets the changing needs for future expansion.

The inverter uses "Twin Sine Inverter" (TSI) technology that eliminates all single points of failure with full scalability; up to 32 modules in parallel and high efficiency of up to 96 % reducing operating costs.

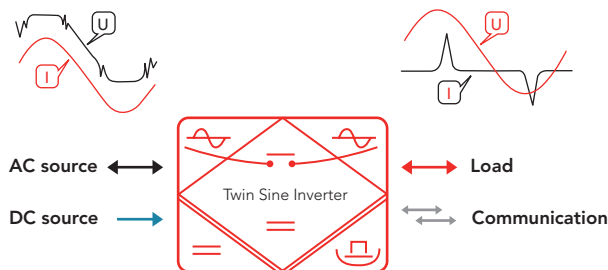

## Main features

- » Compact design
- » High efficiency
- » Hot-swappable solution
- » Modular and scalable architecture
- » No external static switch required as the static switch functionalities are integrated in each Protect MIP Inv module
- » Dual input sources (AC & DC) with wide AC input range 150 VAC to 275 VAC
- » Transfer time reduced to naught
- » Pure sine wave AC output
- » Control and alarm functions for remote management
- » RoHS compliant
- » Easy to operate: compact, light, hot-pluggable, ready to use
- » Easy installation, commissioning and maintenance

# PROTECT MIP INV

SPECIFICATIONS

MODEL	24 / 230	48 / 230	60 / 230	110 / 230	220 / 230
<b>GENERAL</b>					
EMC (immunity)	EN 61000-4 EN 61000-5-2		EN 61000-4		ETSI EN 300-132-2
EMC (emission) (class)	EN 55022 (A)	EN 55022 (B)	EN 55022 (A)	EN 55022 (B)	
Safety	IEC 60950				IEC 60 950-1 & 62040-1
Cooling / isolation	Forced / doubled				
MTBF	240,000 hrs.				
Efficiency (Typical): Enhanced power conversion / on line	94 % / 89 %	96 % / 91 %		96 % / 92.5 %	
Dielectric strength DC / AC	4300 V DC				
True Redundant Systems – compliant	3 disconnection levels on AC <sub>out</sub> and DC <sub>in</sub> power ports 4 disconnection levels on AC <sub>m</sub> port				
RoHS	Compliant				
Connection I / O	Terminal block: Protected against inversion of polarity				
Operating conditions	Self-adaptive to wide operating conditions and comprehensive table of troubleshooting codes				
Altitude above sea without de-rating	<1500 m / derating >1500 m – 0.8 % per 100 m				
Ambient / storage temperature / relative humidity	-20 to 50 °C / -40 to 70 °C / 95 %, non-condensing				
Width x depth x height (mm) / weight (kg)	102 x 435 x 2U / 5 kg				
Material (casing)	Coated steel				
<b>AC OUTPUT POWER</b>					
Nominal Output power (VA) / resistive load (W)	1500 / 1200		2500 / 2000		
Short time overload capacity	150 % 15 seconds / permanent 110 %				
Admissible load power factor	Full power rating from 0 inductive to 0 capacitive				
Internal temperature management and switch off	Yes				
<b>DC INPUT SPECIFICATIONS</b>					
Nominal voltage (DC)	24 V	48 V	60 V	110 V	220 V
Voltage range (DC)	19 – 35 V	40 – 60 V	48 – 72 V	90 – 160 V	170 – 270 V
Nominal current (at 24 VDC and 1200 W output)	56 A		35 A	19 A	9.8 A
Maximum input current (for 15 second) / voltage ripple	84 A	84 A / <2mV	52 A	29 A	15.9 A
Input voltage boundaries	User selectable				
<b>AC INPUT SPECIFICATIONS</b>					
Nominal voltage (AC)	230 V				
Voltage range (AC)	150 – 300 V	150 – 265 V			
Brownout			150 – 185 V		
	1070 W@150 V	1784 W@150 V			
Conformity range	Adjustable				
Power factor	>99 %				
Frequency range (selectable) / synchronization range	50 – 60 Hz / range 47 – 53 Hz / 57 – 63 Hz				
<b>AC OUTPUT SPECIFICATIONS</b>					
Nominal voltage (AC*)	230 V (200 – 240 V range / accuracy 2 %)				
Frequency / frequency accuracy	50 – 60 Hz / 0.03 %				
Total harmonic distortion (resistive load)	<1.5 %				
Load impact recovery time	0.4 ms				
Turn on delay	20 s	40 s	20 s		
Nominal current. Protected against reverse current	6.6 A	10.9 A		10.87 A	
Crest factor at nominal power. With short circuit management and protection	2.8:1 I <sub>n</sub>		3.1:1 I <sub>n</sub>		
Short circuit clear up capacity	10 x I <sub>n</sub> for 20 ms – Available while mains is available at AC input port. With magnitude control and management				
Short circuit current after clear up capacity	2.1 I <sub>n</sub> / after 15 sec 1.5 I <sub>n</sub>				
<b>IN TRANSFER PERFORMANCE</b>					
Max. voltage interruption / total transient voltage duration (max)	0 s / 0 s				
<b>SIGNALING &amp; SUPERVISION</b>					
Display	Synoptic LED				
Alarms output / supervision	Dry contacts on shelf / use optional devices				
Remote on / off on rear connectors					Yes

<b>Архангельск</b> (8182)63-90-72	<b>Ижевск</b> (3412)26-03-58	<b>Магнитогорск</b> (3519)55-03-13	<b>Пермь</b> (342)205-81-47	<b>Сургут</b> (3462)77-98-35
<b>Астана</b> (7172)727-132	<b>Иркутск</b> (395)279-98-46	<b>Москва</b> (495)268-04-70	<b>Ростов-на-Дону</b> (863)308-18-15	<b>Тверь</b> (4822)63-31-35
<b>Астрахань</b> (8512)99-46-04	<b>Казань</b> (843)206-01-48	<b>Мурманск</b> (8152)59-64-93	<b>Рязань</b> (4912)46-61-64	<b>Томск</b> (3822)98-41-53
<b>Барнаул</b> (3852)73-04-60	<b>Калининград</b> (4012)72-03-81	<b>Набережные Челны</b> (8552)20-53-41	<b>Самара</b> (846)206-03-16	<b>Тула</b> (4872)74-02-29
<b>Белгород</b> (4722)40-23-64	<b>Калуга</b> (4842)92-23-67	<b>Нижний Новгород</b> (831)429-08-12	<b>Санкт-Петербург</b> (812)309-46-40	<b>Тюмень</b> (3452)66-21-18
<b>Брянск</b> (4832)59-03-52	<b>Кемерово</b> (3842)65-04-62	<b>Новокузнецк</b> (3843)20-46-81	<b>Саратов</b> (845)249-38-78	<b>Ульяновск</b> (8422)24-23-59
<b>Владивосток</b> (423)249-28-31	<b>Киров</b> (8332)68-02-04	<b>Новосибирск</b> (383)227-86-73	<b>Севастополь</b> (8692)22-31-93	<b>Уфа</b> (347)229-48-12
<b>Волгоград</b> (844)278-03-48	<b>Краснодар</b> (861)203-40-90	<b>Омск</b> (3812)21-46-40	<b>Симферополь</b> (3652)67-13-56	<b>Хабаровск</b> (4212)92-98-04
<b>Вологда</b> (8172)26-41-59	<b>Красноярск</b> (391)204-63-61	<b>Орел</b> (4862)44-53-42	<b>Смоленск</b> (4812)29-41-54	<b>Челябинск</b> (351)202-03-61
<b>Воронеж</b> (473)204-51-73	<b>Курск</b> (4712)77-13-04	<b>Оренбург</b> (3532)37-68-04	<b>Сочи</b> (862)225-72-31	<b>Череповец</b> (8202)49-02-64
<b>Екатеринбург</b> (343)384-55-89	<b>Липецк</b> (4742)52-20-81	<b>Пенза</b> (8412)22-31-16	<b>Ставрополь</b> (8652)20-65-13	<b>Ярославль</b> (4852)69-52-93
<b>Иваново</b> (4932)77-34-06	<b>Киргизия</b> (ак)312-96-26-47	<b>Россия</b> (495)268-04-70	<b>Казахстан</b> (772)734-952-31	

[www.aeg.nt-rt.ru](http://www.aeg.nt-rt.ru) | | [age@nt-rt.ru](mailto:age@nt-rt.ru)